# **Dry Ice Production**

## **ASCO Dry Ice Pelletizer P75i**



The Pelletizer P75i is the most powerful model in the range of **ASCO i-Series dry ice production machines**. At ASCO, i-Series stands for interconnected production. Be it for quick and efficient trouble shooting and maintenance or for gathering of production and performance data - the i-Series offers a wide range of options to link industry 4.0 dry ice production to industry 4.0.

The P75i is the workhorse among the ASCO dry ice pelletizers with a **production capacity of 750 kg/h** (1'653 lb/h). It is built for long-term operation incorporating a heavy duty type hydraulic system controlled by an integrated PLC with touch screen interface. Fully automatic control of oil temperature and dry ice snow production process guarantees continuous dry ice production without any supervision right from the beginning.

The P75i can be ordered as a version with a reduced noise level or with an automatic extruder plate changer. Simply change the production from one set pellet size to another size at the push of a button.

To maximise the  $CO_2$  to dry ice conversion ratio the dry ice pelletizer can be connected to an **ASCO Revert Gas Recovery System**.

Standardly equipped without extruder plate.

Please refer to the options below.

## **Specifications**

Production capacity: Voltage:

Max power consumption: Dimension  $(L \times W \times H)$ : Weight net:

Weight packed: Ø consumption: Noise level P75i standard: Noise level P75i reduced: CO<sub>2</sub> inlet connection:

CO<sub>2</sub> source: Connectivity and remote access: 750 kg/h (1'653 lb/h) 400 VAC  $\pm$  5 %/50 Hz/3 Ph + PE (other voltages and frequencies on request) 19 kW (25.5 HP) 1'700 x 1'100 x 3'860 mm (67 x 44 x 152 in) 1'550 kg (3'410 lb) (without hydraulic oil & options) 1'800 kg (3'960 lb) (with hydraulic oil) 2'250 kg (4'950 lb) (without hydraulic oil) 2'250 kg (4'950 lb) (without hydraulic oil) 7.5 kW (10 HP) 92 dB(A) 1 × 1/2" BSP female CO<sub>2</sub> liquid 1 × 1/4" BSP female CO<sub>2</sub> gas CO<sub>2</sub> storage tank, liquid phase (15-20 bar) (218-290 psi) LAN, Ethernet, WiFi, 3G (other data services on demand)



## ASCO Dry Ice Pelletizer P75i: Options

## Pos. 001

## Noise level reduction for P75i

Option to reduce the noise level of the machine Noise level P75i standard: 92 dB(A) Noise level P75i reduced: 79 dB(A)

#### Pos. 002

### Extruder plate for 3mm (1/8 ") pellets

Extruder plate for ASCO Dry Ice Pelletizer P75i **For manual plate exchange** 

Pellets for blasting purposes

#### Pos. 003

## Extruder plate for 6 mm (1/4 ") pellets

Extruder plate for ASCO Dry Ice Pelletizer P75i **For manual plate exchange** 

Pellets for cooling purposes

#### Pos. 004

### Extruder plate for 10 mm (3/8 ") pellets

Extruder plate for ASCO Dry Ice Pelletizer P75i For manual plate exchange

Pellets for cooling purposes

#### Pos. 005

## Extruder plate for 16 mm (5/8 ") pellets

Extruder plate for ASCO Dry Ice Pelletizer P75i **For manual plate exchange** 


Pellets for cooling purposes

#### Pos. 006

## Extruder plate for 19 mm (3/4 ") pellets


Extruder plate for ASCO Dry Ice Pelletizer P75i **For manual plate exchange** 

Pellets for cooling purposes



part no. 4045147

### part no. 4068099







#### part no. 4045150










part no. 4045146

## ASCO Dry Ice Pelletizer P75i: Automatic Pellet Size Changer

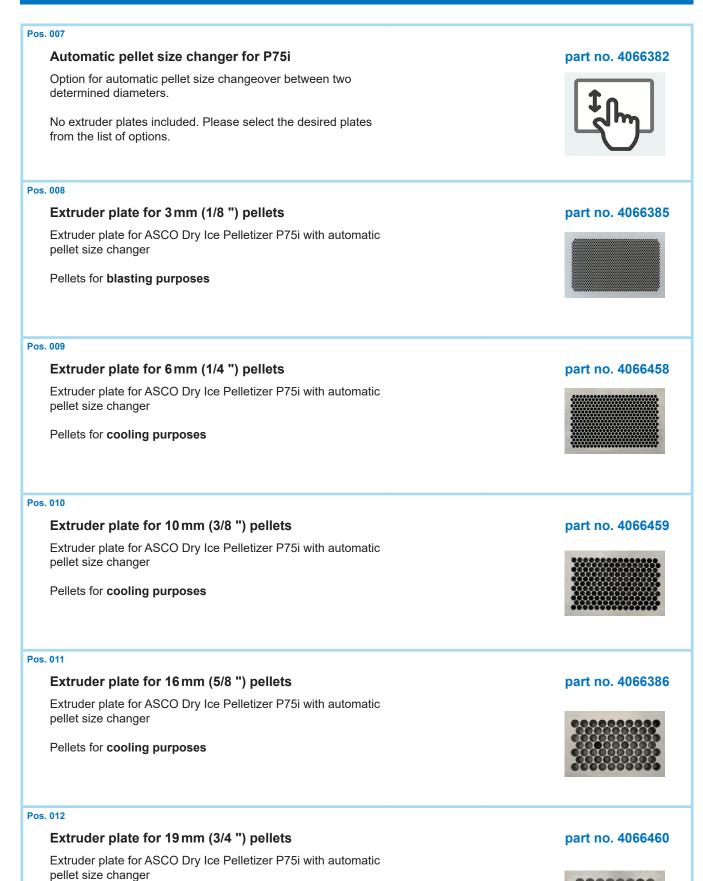





Pellets for cooling purposes

## ASCO Dry Ice Pelletizer P75i: Options

## Pos. 013

## ASCO Spare parts kit for P75i CE

Includes a recommended selection of spare parts to ensure constant operation.



